DR electronics

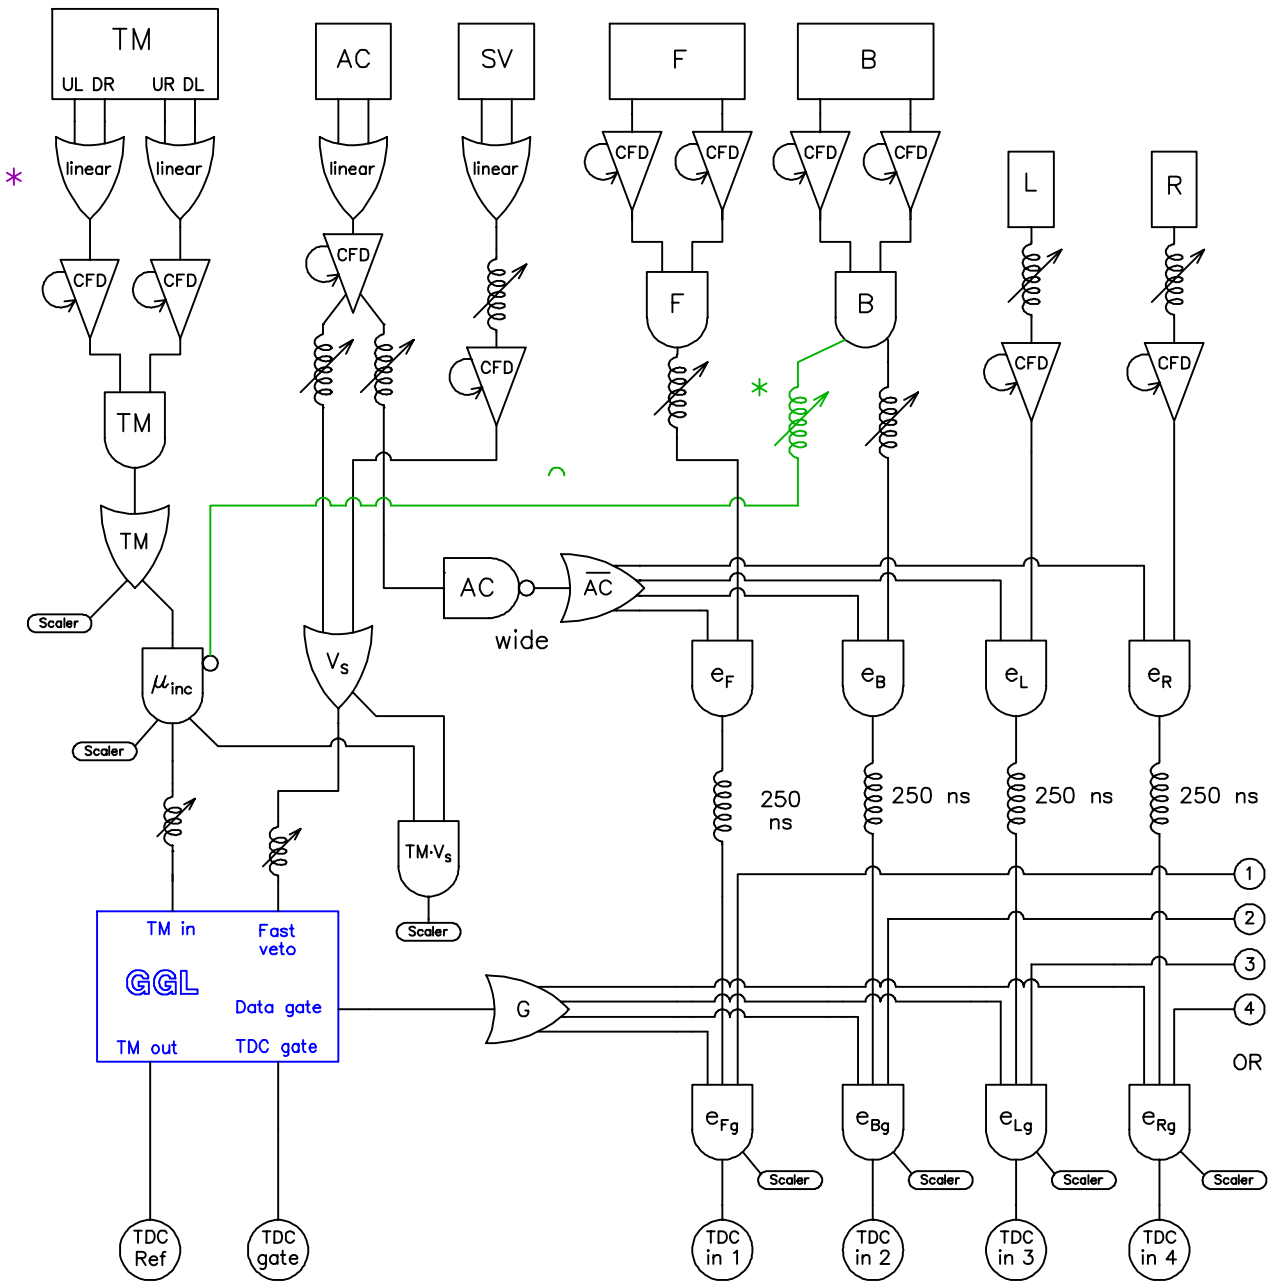

*) See HiTime for best TM discrimination.
SV might use coincidence (for after-pulses)

Order of timing adjustment:

1) Fine adjustment of multiple PMT signals on each single counter.
2) AC to match TM at $TM \cdot V_s$
3) SV to match TM at $TM \cdot V_s$
4) μ_{inc} or V_s so V_s vetos events at GGL (3–5 ns before μ_{inc})
5) F, B, L, R to match $\overline{AC}$ at e_F etc.
* 6) Dangerous option: B to match TM at μ_{inc} (step prevention)